

GV-VD220D / 221D / 222D / 223D 2MP H.264 IR Vandal Proof IP Dome



- 1/2.5" progressive scan CMOS
- Stream 1 from H.264 and MJPEG; Stream 2 from H.264, MPEG4 and MJPEG
- Up to 30 fps at 1920 x 1080
- IK10+ rating (for GV-VD220D and GV-VD221D only)
- IK7 rating (for GV-VD222D and GV-VD223D only)
- IP66 rating
- 3-axis mechanism (pan / tilt / roll)
- Removable IR-cut filter for Day/Night function
- External microphone
- Intelligent IR
- 2-way audio
- One sensor input and alarm output
- TV-out support
- Micro SD/SDHC Card Slot
- DC12V / AC24V / PoE
- Motion detection
- Tampering alarm
- Privacy mask
- IP address filtering
- Supports iPhone, iPad, Android & 3GPP
- 31 languages on Web interface

☞ No SD/SDHC card slot & local storage function for Argentina.

Models

Model	Housing Cover Cover Color	Vandal Resistance
GV-VD220D	Transparent cover	IK10+
GV-VD221D	Smoked cover	IK10+
GV-VD222D	Transparent cover	IK7
GV-VD223D	Smoked cover	IK7

Active Tampering Alarm


Tampered



Focus Change



Camera Shift

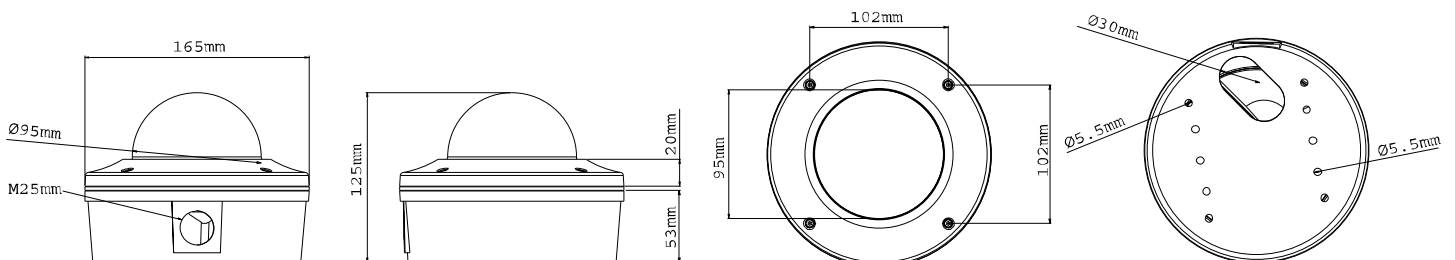

SPECIFICATIONS

Camera		
Image Sensor	1/2.5" progressive scan CMOS"	
Picture Elements	1920 (H) x 1080 (V)	
Minimum Illumination	Color	1 Lux (1/30 sec), 0.5 Lux (1/5 sec)
	B/W IR ON	0 Lux
Shutter Speed	Automatic, Manual (1/5 ~ 1/8000 sec)	
White Balance	Automatic, Manual (2800K ~ 8500K)	
Lens		
Megapixel	Yes	
Day / Night	Yes (with removable IR-cut filter)	
Lens Type	Varifocal	
Focal Length	2.7 ~ 9 mm	
Maximum Aperture	F/1.3	
Mount	Ø 14 mm	
Angle of View	Diagonal	101° (W) ~ 32° (T)
	Horizontal	88° (W) ~ 27.9° (T)
	Vertical	49.7° (W) ~ 15.7° (T)
Operation	Focus	Manual (w / lock)
	Zoom	Manual (w / lock)
	Iris	DC drive
IR LED Quantity	15 IR LEDs	
IR Distance	15 m / 50 ft (Max.)	
Operation		
Video Compression	H.264, MPEG4, MJPEG	
Video Stream	Stream 1 from H.264 and MJPEG Stream 2 from H.264, MPEG4 and MJPEG	
Frame Rate	30 fps at 1920 x 1080 * The frame rate and the performance may vary depending on the number of connections and data bitrates (different scenes).	
Image Setting	Brightness, Contrast, Sharpness, Gamma, White Balance, Flicker-less, Image Orientation, Backlight Compensation, D/N Sensitivity, Shutter Speed	
Audio Compression	G.711, AAC (16 kHz / 16 bit) * AAC is only supported by GV-System V8.5 or later	
Two-way Audio	Yes	
Sensor Input	1 Input (Dry Contact)	
Alarm Output	1 Digital Output (200mA 5V DC)	
Video Resolution		
Main Stream	4:3	1600 x 1200, 1280 x 960, 640 x 480, 320 x 240
	16:9	1920 x 1080, 1280 x 720, 640 x 360, 448 x 252
	5:4	1280 x 1024, 640 x 512, 320 x 256
Sub Stream	4:3	640 x 480, 320 x 240
	16:9	640 x 360, 448 x 252
	5:4	640 x 512, 320 x 256
Network		
Interface	10/100 Ethernet	
Ethernet Protocol	HTTP, HTTPS, TCP, UDP, SMTP, FTP, DHCP, NTP, UPnP, DynDNS, 3GPP/ISMA, RTSP, PSIA, SNMP, QoS (DSCP)	
Mechanical		
Lens Mounting	Ø 14 mm	
Temperature Detector	Yes	
Camera Angle Adjustment	Pan	0° ~ 350°
	Tilt	10° ~ 90°
	Rotate	0° ~ 340°

Connectors	Power	3-pin terminal block, PoE
	Ethernet	RJ-45
	Audio	1 In (RCA female for microphone) 1 Out (RCA female for speaker)
	Digital I/O	I/O Wires
	Auto Iris	DC drive
	Local Storage	Micro SD/SDHC memory card slot (for Class 6 card or above)
	TV-Out	BNC connector (640 x 480).
General		
Environment Temperature		-20 °C ~ 50 °C / 4 °F ~ 122 °F
Humidity		10% to 90% (no condensation)
Power Source		12V DC / 24V AC / PoE
Max. Power Consumption		12 W
Dimensions	Camera Body	∅ 165 x 125 mm / 6.49 x 4.92 in
	Cable Length	1 m / 3.28 ft
	Cable Diameter	∅ 16.7 mm / 0.66 in
	Maximum Connector Diameter	∅16.7 mm / 0.66 in
Weight		1.7 kg / 3.75 lb
Protection Classification		IP66
Vandal Resistance	GV-VD220D / GV-VD221D	IK10+
	GV-VD222D / GV-VD223D	IK7
Regulatory		CE, FCC, C-Tick, RoHS compliant
Power over Ethernet		
PoE Standard		IEEE 802.3af Power over Ethernet / PSE
PoE Power Supply Type		End-Span
PoE Power Output		Per Port 48V DC, 350mA. Max. 15.4 watts
Web Interface		
Installation Management		Web-based configuration
Maintenance		Firmware upgrade through Web Browser or Utility
Access from Web Browser		Camera live view, video recording, change video quality, bandwidth control, image snapshot, digital I/O control, audio, Wide Angle Lens Dewarping, Picture in Picture, Picture and Picture, Privacy Mask, Visual Automation, Tampering Alarm, Text Overlay
Language		Arabic / Bulgarian / Czech / Danish / Dutch / English / Finnish / French / German / Greek / Hebrew / Hungarian / Indonesian / Italian / Japanese / Lithuanian / Norwegian / Persian / Polish / Portuguese / Romanian / Russian / Serbian / Simplified Chinese / Slovakian / Slovenian / Spanish / Swedish / Thai / Traditional Chinese / Turkish
Applications		
Network Storage		GV-NVR, GV-System, GV-Backup Center, GV-Recording Server
Mobile Phone support		GV-AView for Android Smartphone, GV-Eye HD for iPad, GV-Eye for iPhone and iPod Touch, GV-GView for Windows PDA, GV-MSView for Windows Smartphone, GV-SSView for Symbian Smartphone, 3G-enabled phone.
Live Viewing		IE , GV-MultiView
CMS Server support		GV-Control Center, GV-Center V2, GV-VSM

Note:

1. Do not use clothes or any ordinary material to clean the camera cover since they may result in scratches.
2. Specifications are subject to change without notice.